




PH 262

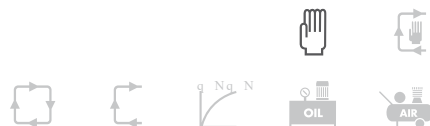

The PH 262 manual pull down band saw machine can mitre from -45° to $+60^{\circ}$. It is also available with the hb (hydraulic brake) device to make single cuts without operator, keeping though the manual pull down mode (hb device is available in the three-phase version only).

FEATURES:


- Structure in grey cast iron g25, reducing drastically vibrations, grant a better stability and longer blade life.
- Wide working surface granting a perfect working condition and safety; turning table integral with saw head to cut at any angles without damaging the working surface
- Sliding vice with sideways movement and fast

positioning system.










- Electrical board with entirely identifiable wiring, stand-by, main switch with lock, short circuit protection, motor overload cutout, min. voltage coil, low voltage system 24 V.
- Control handle IP55.
- Driving pulley locked with clamp ring to ensure a strong fastening, allowing axial adjustment.
- Blade-guide heads with 6 CARBIDE pads instead of bearings to ensure a better stability.
- Fixed stops at -45° 0° $+45^{\circ}$ $+60^{\circ}$ with locking lever to lock the saw head at any angle.
- Saw head pivot point with preloaded tapered bearings.
- Electric pump for the band lubrication and cooling.
- Brush band-cleaning device.
- Bi-metal band saw blade for solids and profiles.
- Instructions manual and spare parts list.



OPTIONALS FROM PAG 47 - N° 02 - 04 - 18 - 19 - 57 - 72 - 80



PH 262 - PH262 HB

								
mm	kW	m/min	mm	0°	225	200	240x160	
2450x27x0,9	0,70/0,81	46/92	245	+ 45°	160	140	155x115	kg
				+ 60°	90	90	90x90	
				- 45°	145	125	150x100	265